
# Pivot Entry Doors



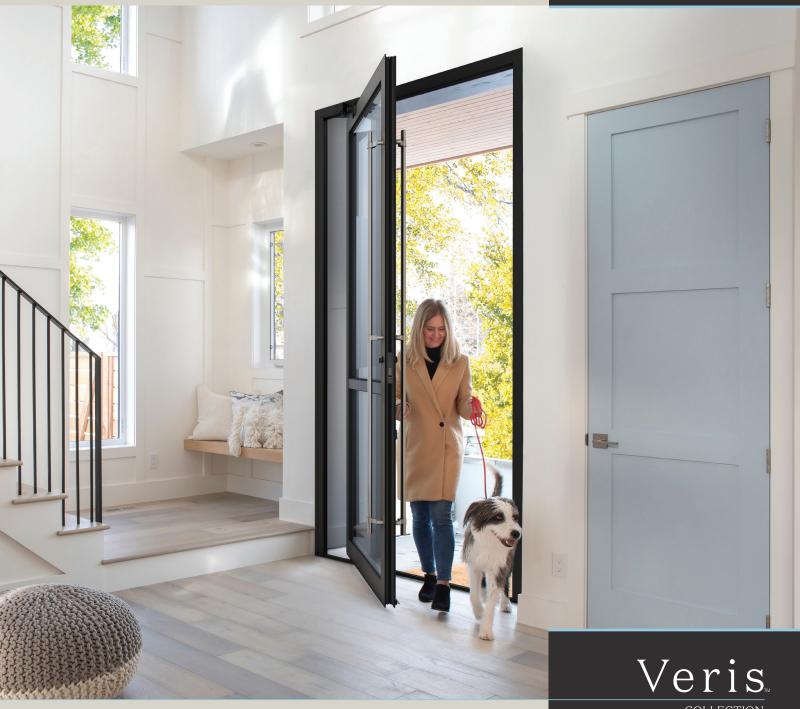

# Modern style. Unique movement.


Experience the epitome of modern style with unique movement. Veris pivot entry doors connect to the door frame from a pivot point at the top and bottom of the door instead of along the edge. Their smooth operation, sleek style and expansive use of glass make them the perfect choice for any contemporary entryway.

COLLECTION



# Confidence in a Complete System

Create the ultimate open-air living experience with superior performance thanks to our full-system approach. With the Veris<sub>m</sub> collection, each piece is engineered to work together seamlessly.

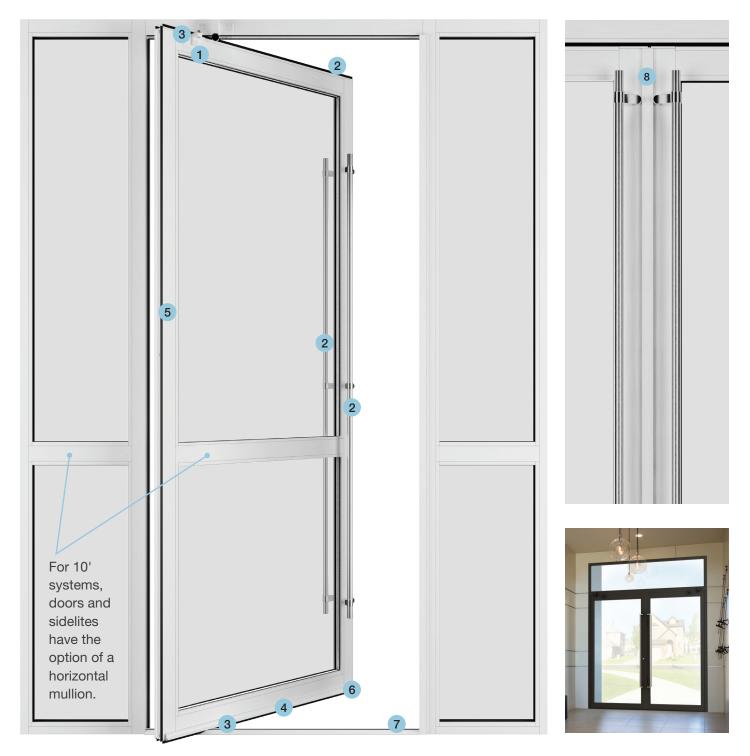

Shown from the exterior side of the door system.

<sup>\*</sup>French door systems and 10' door systems will include flush bolts.

<sup>\*\*</sup>Door systems built with a flush sill have little resistance to water penetration and have a potential to leak if installed exposed to weather. We recommend these systems be installed away from weather under large soffits or overhangs. For ADA compliance, the door must provide a minimum 32" clear opening width. Verify all other ADA compliance requirements with your local building code official.

Component images shown from interior side of the door system.




A **door catch** holds the door open while blending into the system. A rubber stopper provides quiet operation.







In addition to the **deadbolt**, the **flush bolt**\* offers another locking point and is integrated into single and french configurations for added security and enhanced performance in severe weather.





**Pivot hardware** delivers the innovative movement of the pivot door with a **sealed bearing** on the bottom for smooth, quiet operation.



Built-in rain deflector helps protect areas exposed to wind-driven rain, enhancing weather protection.



Thermal break design separates interior and exterior aluminum to reduce heat and cold transfer between indoors and outdoors which helps reduce condensation.



Designed to provide the best possible fit between panel and frame, the **weatherstrip** helps prevent water and air from entering the home.



Thermally broken sills reduce the transfer of heat and cold through the door system for greater energy efficiency while reducing condensation buildup. Available in a flush configuration for ADA compliance.\*\*



As part of french door configurations, an **astragal** is integrated into the unit to assist with sealing the door system for better protection from the elements.

### V-2 vs. V-3



#### V-2 Systems: Built for everyday life.

Our V-2 systems are designed to meet the needs for most homes and structures. Featuring our standard components that are quality tested for long-term use, the V-2 system is perfect for residential dwellings in most areas of the United States.

Panel & System Thickness: 2-1/4" Maximum Height: 8'



#### V-3 Systems: Performance where you need it.

Our V-3 systems are engineered to meet the high-performance needs of specific regions, building codes and commercial structures, and are built to support larger glass panels found in our taller units. With high-performance components that can stand up to heavy-duty use, the V-3 system is ideal for structures and door units that require extra support and stability.

Panel & System Thickness: 3"
Maximum Height: 10'

#### **Size Offering**

Pivot configurations with a door that exceeds 8'0" in height or a transom that exceeds 8'0" in width will be built as a V-3 system.

| Doors  | 5        | Single & French |      |      |      |  |  |  |  |
|--------|----------|-----------------|------|------|------|--|--|--|--|
| Pan    | el Width | 3'6"            | 4'0" | 5'0" | 6'0" |  |  |  |  |
|        | 6'8"     |                 |      |      |      |  |  |  |  |
| Height | 7'0"     |                 |      |      |      |  |  |  |  |
|        | 8'0"     |                 |      |      |      |  |  |  |  |
|        | 9'0"     |                 |      |      |      |  |  |  |  |
|        | 10'0"    |                 |      |      |      |  |  |  |  |

| Sideli | tes   |     |     |     |     |
|--------|-------|-----|-----|-----|-----|
|        | Width | 14" | 18" | 20" | 24" |
| Height | 6'8"  |     |     |     |     |
|        | 7'0"  |     |     |     |     |
|        | 8'0"  |     |     |     |     |
|        | 9'0"  |     |     |     |     |
|        | 10'0" |     |     |     |     |


| Transoms |          | Single &<br>Single w/One Sidelite |      |      | Single w/Two Sidelites |      |      | French |      | French w/Two Sidelites |      |      |      |      |      |
|----------|----------|-----------------------------------|------|------|------------------------|------|------|--------|------|------------------------|------|------|------|------|------|
| Pan      | el Width | 3'6"                              | 4'0" | 5'0" | 6'0"                   | 3'6" | 4'0" | 5'0"   | 6'0" | 3'6"                   | 4'0" | 5'0" | 3'6" | 4'0" | 5'0" |
| Height   | 14"      |                                   |      |      |                        |      |      |        |      |                        |      |      |      |      |      |
|          | 18"      |                                   |      |      |                        |      |      |        |      |                        |      |      |      |      |      |
|          | 20"      |                                   |      |      |                        |      |      |        |      |                        |      |      |      |      |      |
|          | 24"      |                                   |      |      |                        |      |      |        |      |                        |      |      |      |      |      |

| Standard Lead Time |
|--------------------|
| Extended Lead Time |


# Configurations

Shown from the exterior side of the door system.

Available as inswing or outswing.

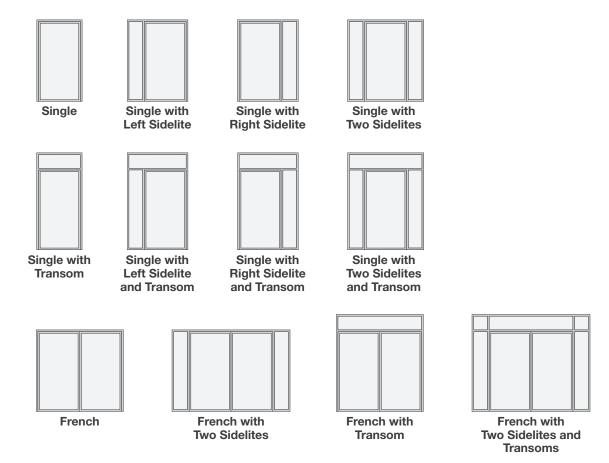



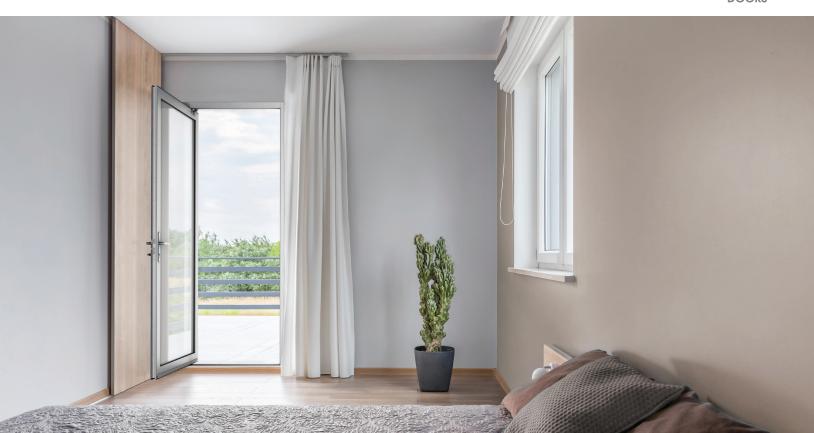

# Glass Options



#### **Enhanced Low-E**

Blocks 95% of the sun's harmful UV rays, helping to preserve the color and materials of your interior furnishings, draperies and wall treatments.\*



#### Low-E

Delivers exceptional energy efficiency, retaining heat in the winter and reflecting it in the summer.



Turtle with Low-E

Tinted gray to reduce interior light projection as required near sea turtle nesting areas. Includes Low-E coating for exceptional energy efficiency.

### Optional Neat+™ Coating

All Low-E glass in the Veris collection is available with Neat+ coating. This low-maintenance coating is designed to help keep glass clear and free of watermarks, reducing the need for cleaning.\*



Without Neat+ Coating


With Neat+ Coating



#### **Divided Lites**

Not available for 10' units.

#### **Available Patterns**



#### **Grilles Between Glass (GBGs)**



GBGs are sealed between two panes of tempered glass for a smooth easyto-clean surface.

Height: 5%" Depth: 3/16"

#### **Finish Options for GBGs**



Split finish not available for GBGs.

# Simulated Divided Lites (SDLs) with Grilles Between Glass (GBGs)

SDLs are adhered to the interior and exterior panes of tempered glass and are finished to complement the door system. For a more authentic divided lite look, SDLs are layered over black GBGs.



Flat Profile
Height: 3/4"

Depth: 5/32"

Traditional Profile
Height: 3/4"

Depth: 15/32"

### Configurations with SDL / GBG Patterns


### Finish

Choose from an on-trend assortment of finishes designed to complement most homes.

#### **Standard Lead Powder Coated**

Similar to semi-gloss finish.






#### **Standard Lead Anodized**

Similar to eggshell finish.





**Extended Lead Powder Coated** 

Similar to semi-gloss finish.



Bone White




Sandstone



Fashion Gray



Charcoal



#### **Additional Split Finish Options**

Choose any two colors to create a split finish that complements the interior and exterior of the home. Available on extended lead time.

Order 3-1/8" x 4" samples of finish colors at store.thermatru.com.

## Sills



#### **Sill Finish Options**

- Clear Anodized
- Dark Bronze Anodized

Flush Sill


## Handlesets

Active handlesets come standard with thumbturn interior lock with keyed exterior.

The multi-point locking system engages the panel and frame at three points for enhanced security while helping to preserve the

compression seal's hold, even under the pressure of high winds.

Inspira and Verge handlesets deliver the minimalist style of a modern door pull. The handles are partially offset from the rail for comfortable access to the lock. The lock features an interior thumbturn and exterior keyed options. French door systems and 10' door systems will also include flush bolts.

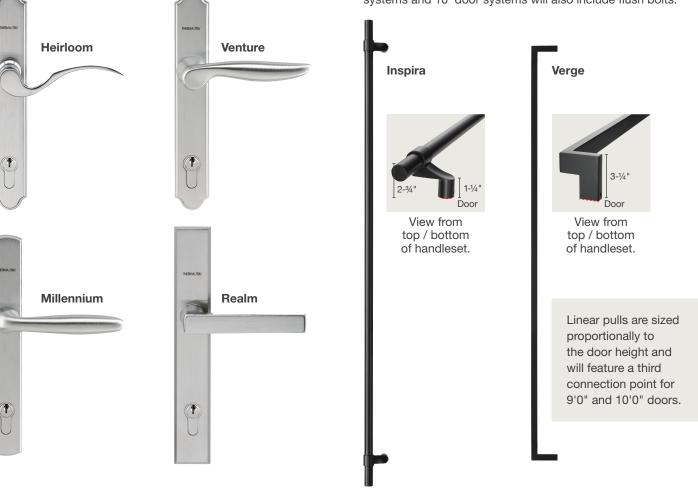

#### **Handleset Finish Options**





**Brass** 

Brushed Nickel





Black Nickel

Satin Nickel



Oil-Rubbed **Bronze** 

#### **Availability**

| Brass | Brushed<br>Nickel | Black Nickel | Satin Nickel | Oil-Rubbed<br>Bronze |
|-------|-------------------|--------------|--------------|----------------------|
|       |                   |              |              |                      |
|       |                   |              |              |                      |
|       |                   |              |              |                      |
|       |                   |              |              |                      |
|       |                   |              |              |                      |
|       |                   |              |              |                      |
|       | Brass             |              |              |                      |





**Extended Lead Time** 




Not Available



### Sill

# Floor Line Flush Sill\* (ADA\*\*)

#### **Vertical & Horizontal Rail**



\*Door systems built with a flush sill have little resistance to water penetration and have a potential to leak if installed exposed to weather. We recommend these systems be installed away from weather under large soffits or overhangs.

\*\*For ADA compliance, the door must provide a minimum 32" clear opening width. Verify all other ADA compliance requirements with your local building code official.




# V-3 Details

### Sill


### **Vertical & Horizontal Rails**

Standard

Rail



Flush Sill\* (ADA\*\*)



10" Bottom Rail\*\*



Stretch Bottom Rail



Scan to learn more.





## About the Veris<sub>TM</sub> Collection

Therma-Tru's Veris collection is manufactured by Solar Innovations – a recently acquired brand of Therma-Tru. Solar Innovations brings more than 20 years of open-air living product innovations, including these high-performing door systems. Featuring expansive glass, these door systems are ideal for contemporary front entries and connecting indoor and outdoor spaces around the home.

# Lifetime Durability & Performance

Designed for easy, worry-free operation, we're so confident in our fully engineered systems that we back them with a 1x transferable lifetime limited warranty for peace of mind. In addition, the finish is covered by a balance-transferable 10-year limited warranty.





Visit VerisCollection.com for details on limited warranties and exclusions.





Where Home Begins...

thermatru.com

1-800-THERMA-TRU (843-7628)

1750 Indian Wood Circle Maumee, OH 43537











#thermatru



©2023 Therma-Tru Corp. All rights reserved. All trademarks and images featured are owned by their respective company and used with permission. Registered trademarks are registered in the U.S. and may be registered internationally. Therma-Tru Corp. and Solar Innovations LLC are part of Fortune Brands Innovations, Inc. – an industry-leading home and security products company. Neat+ is a trademark of Cardinal Glass Industries Inc. and is used here with permission.