

Unit and Rough Opening Sizing

French - 7/8" Astragal - 6/6, 6/8, 7/0, 8/0

French - Inswing - Astragal

Brickmould Dim.	52 11/16"	60 11/16"	64 11/16"	68 11/16"	72 11/16"	76 11/16"	
Rough Opening	50 15/16"	58 15/16"	62 15/16"	66 15/16"	70 15/16"	74 15/16"	
Unit Dimension	50 3/16"	58 3/16"	62 3/16"	66 3/16"	70 3/16"	74 3/16"	

80 1/2" 79 3/4" 79 1/4"	6/6							78 5/8"	78 1/16"	79 9/16"
		4/0	4/8	5/0	5/4	5/8	6/0			
	6/8							80 15/16"	80 3/8"	81 7/8"
		4/0	4/8	5/0	5/4	5/8	6/0			
86 7/8" 86" 85 5/8"	7/0							84 15/16"	84 3/8"	85 7/8"
	4/0	4/8	5/0	5/4	5/8	6/0				
98 7/8" 98" 97 5/8"	8/0							96 15/16"	96 3/8"	97 7/8"
	4/0	4/8	5/0	5/4	5/8	6/0				

50 3/16"	58 3/16"	62 3/16"	66 3/16"	70 3/16"	74 3/16"	Unit Dim.
50 15/16"	58 15/16"	62 15/16"	66 15/16"	70 15/16"	74 15/16"	Rough Opening
53 3/16"	61 3/16"	65 3/16"	69 3/16"	73 3/16"	77 3/16"	Brickmould Dim.


Composite	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
-----------	----------	----------	----------	----------	----------	----------

French - Outswing - Astragal


For units with public access sills, subtract 13/16" from inswing height. Unit widths will be the same as in the table above.

Hand Designations	
(Viewed from the exterior)	
A	Astragal (Passive)
L	Left Hand
R	Right Hand

Inswing



Outswing



Double - Standard Mullion - 6/6, 6/8, 7/0, 8/0

Double - Inswing - Standard Mullion


Brickmould Dim.	53"	61"	65"	69"	73"	77"	
Rough Opening	51 1/4"	59 1/4"	63 1/4"	67 1/4"	71 1/4"	75 1/4"	
Unit Dimension	50 1/2"	58 1/2"	62 1/2"	66 1/2"	70 1/2"	74 1/2"	

80 1/2"	79 3/4"	79 1/4"	6/6							78 5/8"	79 1/8"	80 1/8"
			6/8							80 15/16"	81 7/16"	82 7/16"
			7/0							84 15/16"	85 7/16"	86 7/16"
			8/0							96 15/16"	97 7/16"	98 7/16"
			4/0	4/8	5/0	5/4	5/8	6/0	Unit Dim.			
			50 1/2"	58 1/2"	62 1/2"	66 1/2"	70 1/2"	74 1/2"	Rough Opening			
			51 1/4"	59 1/4"	63 1/4"	67 1/4"	71 1/4"	75 1/4"	Brickmould Dim.			
			53 1/2"	61 1/2"	65 1/2"	69 1/2"	73 1/2"	77 1/2"				


Double - Outswing - Standard Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing

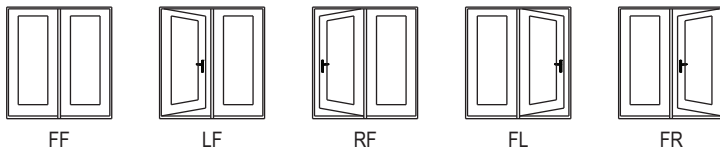

Outswing

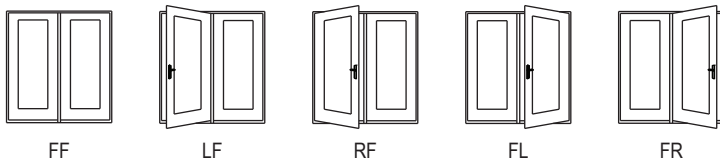

Unit and Rough Opening Sizing

Double - Wide Mullion - 6/6, 6/8, 7/0, 8/0


Double - Inswing - Wide Mullion

Brickmould Dim.	53 1/2"	61 1/2"	65 1/2"	69 1/2"	73 1/2"	77 1/2"	
Rough Opening	51 3/4"	59 3/4"	63 3/4"	67 3/4"	71 3/4"	75 3/4"	
Unit Dimension	51"	59"	63"	67"	71"	75"	
80 1/2" 79 3/4" 79 1/4"	6/6						
	6/8						
	7/0						
	8/0						
	51"	59"	63"	67"	71"	75"	Unit Dim.
	51 3/4"	59 3/4"	63 3/4"	67 3/4"	71 3/4"	75 3/4"	Rough Opening
	54"	62"	66"	70"	74"	78"	Brickmould Dim.


Double - Outswing - Wide Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing

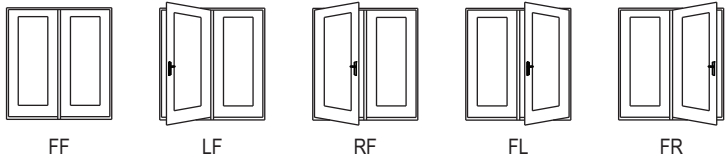

Unit and Rough Opening Sizing

Triple - Wide Mullion - 6/6, 6/8, 7/0, 8/0

Triple - Inswing - Wide Mullion


Brickmould Dim.	79"	91"	97"	103"	109"	115"	
Rough Opening	77 1/4"	89 1/4"	95 1/4"	101 1/4"	107 1/4"	113 1/4"	
Unit Dimension	76 1/2"	88 1/2"	94 1/2"	100 1/2"	106 1/2"	112 1/2"	

80 1/2"	79 3/4"	79 1/4"	6/6	6/0	7/0	7/6	8/0	8/6	9/0	78 5/8"	80 1/8"	82 7/16"	Composite
82 7/8"	82"	81 5/8"	6/8	6/0	7/0	7/6	8/0	8/6	9/0	80 15/16"	81 7/16"	85 7/16"	Composite
86 7/8"	86"	85 5/8"	7/0	6/0	7/0	7/6	8/0	8/6	9/0	84 15/16"	85 7/16"	97 7/16"	Composite
98 7/8"	98"	97 5/8"	8/0	6/0	7/0	7/6	8/0	8/6	9/0	96 15/16"	98 7/16"		Composite
				76 1/2"	88 1/2"	94 1/2"	100 1/2"	106 1/2"	112 1/2"		Unit Dim.		
				77 1/4"	89 1/4"	95 1/4"	101 1/4"	107 1/4"	113 1/4"		Rough Opening		
				79 1/2"	91 1/2"	97 1/2"	103 1/2"	109 1/2"	115 1/2"		Brickmould Dim.		


Triple - Outswing - Wide Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing

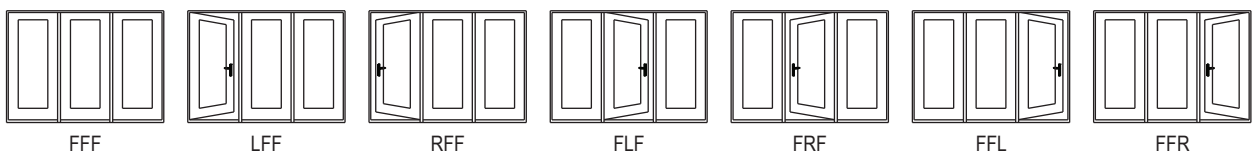

Outswing

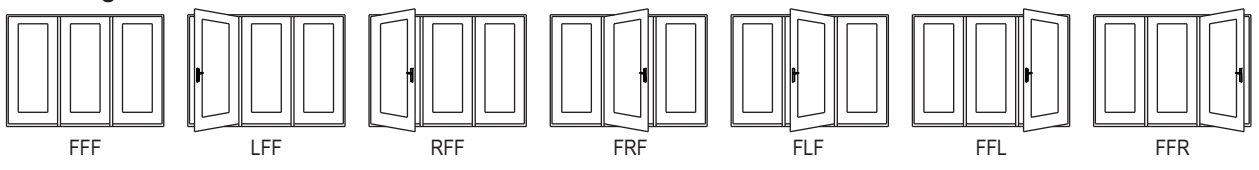

Single - Continuous with 10" Sidelite - Standard Mullion - 6/6, 6/8, 7/0, 8/0

Single with 1 Sidelite - Inswing - Continuous Standard Mullion


Brickmould Dim.	43"	45"	47"	49"	51"	57"	
Rough Opening	41 1/4"	43 1/4"	45 1/4"	47 1/4"	49 1/4"	55 1/4"	
Unit Dimension	40 1/2"	42 1/2"	44 1/2"	46 1/2"	48 1/2"	54 1/2"	

80 1/2" 79 3/4" 79 1/4"	6/6							78 5/8"	78 1/16"	79 9/16"	80 1/8"	79 9/16"	81 7/8"	
		2/4	2/6	2/8	2/10	3/0	3/6							
	82 7/8" 82" 81 5/8"	6/8							80 15/16"	80 3/8"	81 7/16"	80 7/8"	82 7/16"	81 7/8"
		2/4	2/6	2/8	2/10	3/0	3/6							
86 7/8" 86" 85 5/8"	7/0							84 15/16"	84 3/8"	85 7/16"	84 7/8"	86 7/16"	85 7/8"	
	2/4	2/6	2/8	2/10	3/0	3/6								
98 7/8" 98" 97 5/8"	8/0							96 15/16"	96 3/8"	97 7/16"	96 7/8"	98 7/16"	97 7/8"	
	2/4	2/6	2/8	2/10	3/0	3/6								
								Unit Dim.	Aluminum Composite	Aluminum Composite	Aluminum Composite	Aluminum Composite	Aluminum Composite	
								Rough Opening						
								Brickmould Dim.						


Single with 1 Sidelite - Outswing - Continuous Standard Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Unit and Rough Opening Sizing

Single - Continuous with 12" Sidelite - Standard Mullion - 6/6, 6/8, 7/0, 8/0


Single with 1 Sidelite - Inswing - Continuous Standard Mullion

		45"	47"	49"	51"	53"	59"		
Brickmould Dim.		45"	47"	49"	51"	53"	59"		
Rough Opening		43 1/4"	45 1/4"	47 1/4"	49 1/4"	51 1/4"	57 1/4"		
Unit Dimension		42 1/2"	44 1/2"	46 1/2"	48 1/2"	50 1/2"	56 1/2"		
80 1/2" 79 3/4" 79 1/4"	6/6							78 5/8"	78 1/16"
		2/4	2/6	2/8	2/10	3/0	3/6		79 1/8"
	6/8							80 15/16"	80 1/8"
		2/4	2/6	2/8	2/10	3/0	3/6		80 7/8"
82 7/8" 82" 81 5/8"	7/0							84 15/16"	84 7/8"
		2/4	2/6	2/8	2/10	3/0	3/6		85 7/16"
86 7/8" 86" 85 5/8"	8/0							96 15/16"	96 3/8"
		2/4	2/6	2/8	2/10	3/0	3/6		97 7/16"
98 7/8" 98" 97 5/8"								96 15/16"	96 3/8"
		2/4	2/6	2/8	2/10	3/0	3/6		97 7/8"
		42 1/2"	44 1/2"	46 1/2"	48 1/2"	50 1/2"	56 1/2"	Unit Dim.	
		43 1/4"	45 1/4"	47 1/4"	49 1/4"	51 1/4"	57 1/4"	Rough Opening	
		45 1/2"	47 1/2"	49 1/2"	51 1/2"	53 1/2"	59 1/2"	Brickmould Dim.	


Single with 1 Sidelite - Outswing - Continuous Standard Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Unit and Rough Opening Sizing

Single - Continuous with 2-10" Sidelites - Standard Mullion - 6/6, 6/8, 7/0, 8/0


Single with 2 Sidelites - Inswing - Continuous Standard Mullion

Brickmould Dim.	54"	56"	58"	60"	62"	68"			
Rough Opening	52 1/4"	54 1/4"	56 1/4"	58 1/4"	60 1/4"	66 1/4"			
Unit Dimension	51 1/2"	53 1/2"	55 1/2"	57 1/2"	59 1/2"	65 1/2"			
80 1/2"	79 3/4"	79 1/4"					78 5/8"	78 1/16"	79 9/16"
82 7/8"	82"	81 5/8"					80 15/16"	80 3/8"	81 7/8"
86 7/8"	86"	85 5/8"					84 15/16"	84 3/8"	85 7/8"
98 7/8"	98"	97 5/8"					96 15/16"	96 3/8"	97 7/8"
							Unit Dim.	Aluminum Composite	Aluminum Composite
							Rough Opening	Aluminum Composite	Aluminum Composite
							Brickmould Dim.	Aluminum Composite	Aluminum Composite
	51 1/2"	53 1/2"	55 1/2"	57 1/2"	59 1/2"	65 1/2"			
	52 1/4"	54 1/4"	56 1/4"	58 1/4"	60 1/4"	66 1/4"			
	54 1/2"	56 1/2"	58 1/2"	60 1/2"	62 1/2"	68 1/2"			


Single with 2 Sidelites - Outswing - Continuous Standard Mullion

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Single - Continuous with 2-12" Sidelites - Standard Mullion - 6/6, 6/8, 7/0, 8/0


Single with 2 Sidelites - Inswing - Continuous Standard Mullion

Brickmould Dim.		58"	60"	62"	64"	66"	72"												
Rough Opening		56 1/4"	58 1/4"	60 1/4"	62 1/4"	64 1/4"	70 1/4"												
Unit Dimension		55 1/2"	57 1/2"	59 1/2"	61 1/2"	63 1/2"	69 1/2"												
80 1/2" 79 3/4" 79 1/4"	6/6							78 5/8"	78 1/16"	79 9/16"	80 1/8"	81 7/8"	82 7/16"	82 7/16"	81 7/8"	85 7/8"	97 7/8"	Aluminum Composite	
	6/8							80 15/16"	80 3/8"	81 7/16"	80 7/8"	81 7/16"	84 7/8"	86 7/16"	86 7/16"	85 7/8"	98 7/16"	Aluminum Composite	
	7/0							84 15/16"	84 3/8"	85 7/16"	84 7/8"	85 7/16"	88 1/2"	88 1/2"	88 1/2"	88 1/2"	96 3/8"	Aluminum Composite	
	8/0							96 15/16"	96 3/8"	97 7/16"	96 7/8"	97 7/16"	98 1/2"	98 1/2"	98 1/2"	98 1/2"	96 3/8"	Aluminum Composite	
		55 1/2"	57 1/2"	59 1/2"	61 1/2"	63 1/2"	69 1/2"	Unit Dim.											
		56 1/4"	58 1/4"	60 1/4"	62 1/4"	64 1/4"	70 1/4"	Rough Opening											
		58 1/2"	60 1/2"	62 1/2"	64 1/2"	66 1/2"	72 1/2"	Brickmould Dim.											


Single with 2 Sidelites - Outswing - Continuous Standard Mullion

Hand Designations (Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Single with 10" Sidelite - Boxed or Continuous Mullion Wide - 6/6, 6/8, 7/0, 8/0

Single with 1 Sidelite - Inswing - Boxed or Continuous Wide Mullion

Brickmould Dim.	43 1/2"	45 1/2"	47 1/2"	49 1/2"	51 1/2"	57 1/2"	
Rough Opening	41 3/4"	43 3/4"	45 3/4"	47 3/4"	49 3/4"	55 3/4"	
Unit Dimension	41"	43"	45"	47"	49"	55"	
80 1/2"							79 1/4"
82 7/8"							81 5/8"
86 7/8"							85 5/8"
98 7/8"							97 5/8"
	41"	43"	45"	47"	49"	55"	Unit Dim.
	41 3/4"	43 3/4"	45 3/4"	47 3/4"	49 3/4"	55 3/4"	Rough Opening
	44"	46"	48"	50"	52"	58"	Brickmould Dim.
							78 5/8"
							80 1/16"
							80 3/8"
							81 7/16"
							82 7/16"
							84 3/8"
							84 15/16"
							85 7/8"
							86 7/16"
							87 7/8"
							88 1/16"
							90 1/16"
							92 1/16"
							94 1/16"
							96 3/8"
							96 15/16"
							Composite
							Aluminum
							Aluminum
							Composite
							Aluminum
							Composite
							Aluminum
							Composite
							Aluminum
							Composite

Single with 1 Sidelite - Outswing - Boxed or Continuous Wide Mullion

For Spread Mullion Configurations (3/0 only):


Add the total spread amount to width listed. For example, the unit size of a 3/0 unit with one 10" sidelite and one mullion spread 3/4" would be: 49" unit size + 3/4" spread = 49 3/4"

Units can be spread 0" to 3" in 1/4" increments.


Spread mullion only available in 3/0 inswing.

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Unit and Rough Opening Sizing

Single with 12" Sidelite - Boxed or Continuous Wide Mullion - 6/6, 6/8, 7/0, 8/0

Single with 1 Sidelite - Inswing - Boxed or Continuous Wide Mullion

Brickmould Dim.	45 1/2"	47 1/2"	49 1/2"	51 1/2"	53 1/2"	59 1/2"		
Rough Opening	43 3/4"	45 3/4"	47 3/4"	49 3/4"	51 3/4"	57 3/4"		
Unit Dimension	43"	45"	47"	49"	51"	57"		
80 1/2"							79 9/16"	79 9/16"
79 3/4"							80 1/8"	80 1/8"
79 1/4"							81 1/8"	81 1/8"
82 7/8"							82 7/8"	82 7/8"
82 7/8"							80 15/16"	81 7/8"
82"							80 7/8"	80 7/8"
81 5/8"							81 7/16"	81 7/16"
86 7/8"							82 7/16"	82 7/16"
86 7/8"							84 15/16"	85 7/8"
86"							84 3/8"	84 3/8"
85 5/8"							85 7/16"	85 7/16"
98 7/8"							86 7/16"	86 7/16"
98 7/8"							96 15/16"	97 7/8"
98"							96 3/8"	96 3/8"
97 5/8"							97 7/16"	97 7/16"
							98 7/16"	98 7/16"
							Unit Dim.	
	43"	45"	47"	49"	51"	57"	Rough Opening	
	43 3/4"	45 3/4"	47 3/4"	49 3/4"	51 3/4"	57 3/4"	Brickmould Dim.	
	46"	48"	50"	52"	54"	60"		

Single with 1 Sidelite - Outswing - Boxed or Continuous Wide Mullion

For Spread Mullion Configurations (3/0 only):


Add the total spread amount to width listed. For example, the unit size of a 3/0 unit with one 12" sidelite and one mullion spread 3/4" would be: 51" unit size + 3/4" spread = 51 3/4"

Units can be spread 0" to 3" in 1/4" increments.


Spread mullion only available in 3/0 inswing.

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing

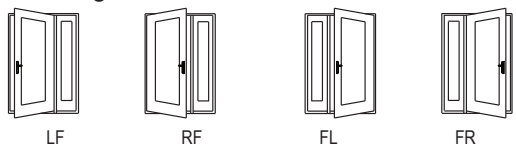

Unit and Rough Opening Sizing

Single with 2-10" Sidelites - Boxed or Continuous Wide Mullion - 6/6, 6/8, 7/0, 8/0

Single with 2 Sidelites - Inswing - Boxed or Continuous Wide Mullion

Brickmould Dim.	55"	57"	59"	61"	63"	69"	
Rough Opening	53 1/4"	55 1/4"	57 1/4"	59 1/4"	61 1/4"	67 1/4"	
Unit Dimension	52 1/2"	54 1/2"	56 1/2"	58 1/2"	60 1/2"	66 1/2"	
							Unit Dim.
							Rough Opening
							Brickmould Dim.
	52 1/2"	54 1/2"	56 1/2"	58 1/2"	60 1/2"	66 1/2"	
	53 1/4"	55 1/4"	57 1/4"	59 1/4"	61 1/4"	67 1/4"	
	55 1/2"	57 1/2"	59 1/2"	61 1/2"	63 1/2"	69 1/2"	
80 1/2"							79 9/16"
79 3/4"							80 1/8"
79 1/4"							78 9/16"
							79 1/8"
							78 1/16"
							80 3/8"
82 7/8"							81 5/8"
82"							80 7/8"
81 5/8"							81 7/16"
							80 15/16"
							84 3/8"
86 7/8"							85 5/8"
86"							86 7/16"
85 5/8"							84 7/8"
							85 7/16"
							84 15/16"
							96 3/8"
98 7/8"							97 7/8"
98"							98 7/16"
97 5/8"							96 7/8"
							97 7/16"
							96 3/8"
							96 15/16"
							Composite
							Aluminum
							Aluminum
							Composite
							Aluminum
							Composite
							Aluminum
							Composite

Single with 2 Sidelites - Outswing - Boxed or Continuous Wide Mullion

For Spread Mullion Configurations (3/0 only):

Add the total spread amount to width listed. For example, the unit size of a 3/0 unit with two 10" sidelites

and two mullions spread 3/4" each would be: 60 1/2" unit size + 3/4" spread + 3/4" spread = 62"

Units can be spread 0" to 3" per mullion in 1/4" increments. (0" to 6" per unit in 1/2" increments).

Spread mullion only available in 3/0 inswing.

Hand Designations

(Viewed from the exterior)

F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



FLF



FRF

Outswing



FLF



FRF

Single with 2-12" Sidelites - Boxed or Continuous Wide Mullion - 6/6, 6/8, 7/0, 8/0

Single with 2 Sidelites - Inswing - Boxed or Continuous Wide Mullion

Brickmould Dim.	59"	61"	63"	65"	67"	73"	
Rough Opening	57 1/4"	59 1/4"	61 1/4"	63 1/4"	65 1/4"	71 1/4"	
Unit Dimension	56 1/2"	58 1/2"	60 1/2"	62 1/2"	64 1/2"	70 1/2"	

80 1/2"	79 3/4"	79 1/4"	6/6	2/4	2/6	2/8	2/10	3/0	3/6	78 5/8"	78 1/16"	79 1/8"	78 9/16"	80 1/8"	79 9/16"	Aluminum	
82 7/8"	82"	81 5/8"	6/8	2/4	2/6	2/8	2/10	3/0	3/6	80 15/16"	80 3/8"	81 7/16"	80 7/8"	82 7/16"	81 7/8"	Composite	
86 7/8"	86"	85 5/8"	7/0	2/4	2/6	2/8	2/10	3/0	3/6	84 15/16"	84 3/8"	85 7/16"	84 7/8"	86 7/16"	85 7/8"	Aluminum	
98 7/8"	98"	97 5/8"	8/0	2/4	2/6	2/8	2/10	3/0	3/6	96 15/16"	96 3/8"	97 7/16"	96 7/8"	98 7/16"	97 7/8"	Composite	
										Unit Dim.							
										Rough Opening							
										Brickmould Dim.							

Single with 2 Sidelites - Outswing - Boxed or Continuous Wide Mullion

For Spread Mullion Configurations (3/0 only):

Add the total spread amount to width listed. For example, the unit size of a 3/0 unit with two 12" sidelites and two mullions spread 3/4" each would be: 64 1/2" unit size + 3/4" spread + 3/4" spread = 66" Units can be spread 0" to 3" per mullion in 1/4" increments. (0" to 6" per unit in 1/2" increments). Spread mullion only available in 3/0 inswing.

Hand Designations

(Viewed from the exterior)

F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



FLF




FRF

Outswing



FLF



FRF

Unit and Rough Opening Sizing

Single with 2-14" Sidelites - Boxed or Continuous Wide Mullion - 6/6, 6/8, 7/0, 8/0 Single with 2 Sidelites - Inswing - Boxed or Continuous Wide Mullion

Brickmould Dim.	63"	65"	67"	69"	71"	77"	
Rough Opening	61 1/4"	63 1/4"	65 1/4"	67 1/4"	69 1/4"	75 1/4"	
Unit Dimension	60 1/2"	62 1/2"	64 1/2"	66 1/2"	68 1/2"	74 1/2"	
							Unit Dim.
							Rough Opening
							Brickmould Dim.
							Material


Single with 2 Sidelites - Outswing - Boxed or Continuous Wide Mullion

For Spread Mullion Configurations (3/0 only):


Add the total spread amount to width listed. For example, the unit size of a 3/0 unit with two 14" sidelites and two mullions spread 3/4" each would be: 68 1/2" unit size + 3/4" spread + 3/4" spread = 70". Units can be spread 0" to 3" per mullion in 1/4" increments. (0" to 6" per unit in 1/2" increments). Spread mullion only available in 3/0 inswing.

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel
L	Left Hand
R	Right Hand

Inswing



Outswing



Sidelite - 6/6, 6/8, 7/0, 8/0
Sidelite - Inswing

Rough Opening		Unit Dimension		
		11 1/2"	13 1/2"	15 1/2"
79 3/4"	6/6	10"	12"	14"
79 1/4"				
82"	6/8	10"	12"	14"
81 5/8"				
86"	7/0	10"	12"	14"
85 5/8"				
98"	8/0	10"	12"	14"
97 5/8"				
		11 1/2"	13 1/2"	15 1/2"
		*	*	*

78 5/8"	78 9/16"	80 7/8"	84 7/8"	96 7/8"	Aluminum Composite
78 1/16"	79 1/8"	81 7/16"	85 7/16"	97 7/16"	Aluminum Composite
80 3/8"	80 3/8"	84 3/8"	84 3/8"	96 3/8"	Aluminum Composite
80 15/16"	80 15/16"	84 15/16"	84 15/16"	96 15/16"	Aluminum Composite

Sidelite - Outswing

*Add actual unit dimension to door rough opening width for total rough opening width.

Hand Designations	
(Viewed from the exterior)	
F	Fixed Panel

Inswing



F

Outswing




F

Unit and Rough Opening Sizing

Single with 12" Venting Sidelite - Wide Mullion - 6/6, 6/8 Single with Venting Sidelite - Wide Mullion

Brickmould Dim.		53 3/4"
Rough Opening		52"
Unit Dimension		51 1/4"

80 1/2"	79 3/4"	79 1/4"	6/6	
			3/0	
82 7/8"	82"	81 5/8"	6/8	
			3/0	

*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
S	Vented Sidelite (hinged off jamb)

Inswing



SL



SR






LS



RS

Single with 14" Venting Sidelite - Wide Mullion - 6/6, 6/8, 8/0
Single with Venting Sidelite - Wide Mullion


Brickmould Dim.	55 3/4"
Rough Opening	54"
Unit Dimension	53 1/4"

80 1/2"	79 3/4"	79 1/4"	6/6		3/0
82 7/8"	82"	81 5/8"	6/8		3/0
98 7/8"	98"	97 5/8"	8/0		3/0

*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
S	Vented Sidelite (hinged off jamb)

Inswing



SL



SR



LS




RS

Unit and Rough Opening Sizing

Single with 2-12" Venting Sidelites - Wide Mullion - 6/6, 6/8 Single with Venting Sidelites - Wide Mullion


Brickmould Dim.	67 7/16"
Rough Opening	65 11/16"
Unit Dimension	64 15/16"

80 1/2"	79 3/4"	79 1/4"	6/6		3/0
82 7/8"	82"	81 5/8"	6/8		3/0

*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
S	Sidelite




Inswing



Single with 2-14" Venting Sidelites - Wide Mullion - 6/6, 6/8, 8/0

Single with Venting Sidelites - Wide Mullion


Brickmould Dim.	71 7/16"
Rough Opening	69 11/16"
Unit Dimension	68 15/16"

80 1/2"	79 3/4"	79 1/4"	6/6		3/0
82 7/8"	82"	81 5/8"	6/8		3/0
98 7/8"	98"	97 5/8"	8/0		3/0

*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
S	Sidelite

Inswing




Unit and Rough Opening Sizing

French with 2-12" Venting Sidelites - Wide Mullion - 6/6, 6/8

French with Venting Sidelites - Wide Mullion


Brickmould Dim.	100 1/8"	104 1/8"
Rough Opening	98 3/8"	102 3/8"
Unit Dimension	97 5/8"	101 5/8"

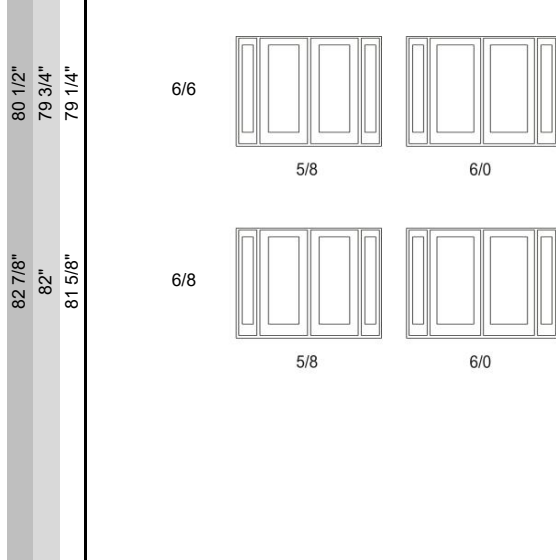


*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
A	Astragal
S	Sidelite

Inswing



SLAS




SARS

French with 2-14" Venting Sidelites - Wide Mullion - 6/6, 6/8, 8/0

French with Venting Sidelites - Wide Mullion


Brickmould Dim.	104 1/8"	108 1/8"
Rough Opening	102 3/8"	106 3/8"
Unit Dimension	101 5/8"	105 5/8"

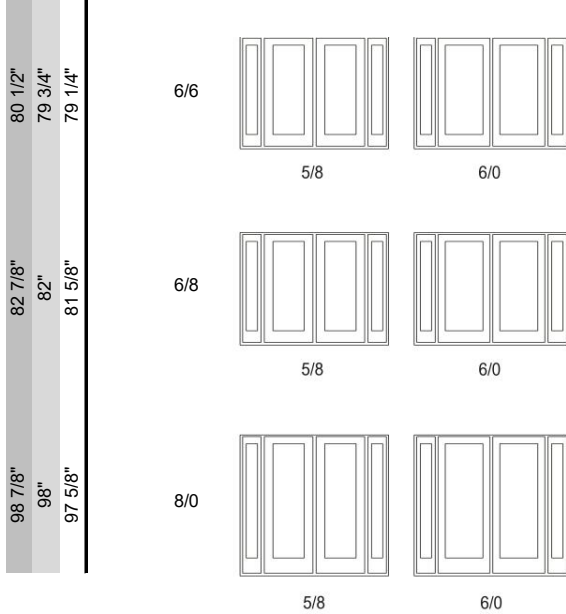


*Outswing not available.

Hand Designations	
(Viewed from the exterior)	
L	Left Hand
R	Right Hand
A	Astragal
S	Sidelite

Inswing






SLAS



SARS









Unit and Rough Opening Sizing

Single Transoms

Unit Dimension	37 1/2"	13 1/2"	15 1/2"
13 15/32"			
	3/0	12"	14"





*Add actual unit dimension to door rough opening height for total rough opening height.

Double - Standard Continuous Mullion Transoms

Unit Dimension	62 1/2"	66 1/2"	70 1/2"	74 1/2"
13 15/32"				
13 5/8"				
	5/0	5/4	5/8	6/0
	5/0	5/4	5/8	6/0





*Add actual unit dimension to door rough opening height for total rough opening height.

Single with 2 Sidelites - Boxed Transoms

Unit Dimension	64 1/2"	68 1/2"
13 15/32"		
13 5/8"		
	3/0 w/ 2-12" SL	3/0 w/ 2-14" SL
	3/0 w/ 2-12" SL	3/0 w/ 2-14" SL

*Add actual unit dimension to door rough opening height for total rough opening height.

Single with 2 Sidelites - Continuous Transoms

Unit Dimension	63 1/2"	67 1/2"
13 15/32"		
13 5/8"		
	3/0 w/ 2-12" SL	3/0 w/ 2-14" SL
	3/0 w/ 2-12" SL	3/0 w/ 2-14" SL

*Add actual unit dimension to door rough opening height for total rough opening height.